

Integration Note

Manufacturer:	Tholz
Model Number(s):	SmartPool
g! Core Module Version:	8.7.602
Driver Developer:	Zoom Digital Home
Document Revision Date:	06 August 2025

Overview

This driver integrates Tholz SmartPool 2º Generation controller into Nice automation by IP connection with feedback support.

Supported models: SmartPool and SmartPool Basic.

Supported Features

- **Thermostats:** two thermostats to control the pool heating system.
- **RGB Led:** dimmer the light and color wheel to select.
- **Aux Relay:** auxiliary relay on/off control.
- **Effects:** 8 personalized effects control.

Any feature not specifically noted as supported should be assumed to be unsupported.
--

Driver License

This driver works for a trial period. After that it will require a license key to function.

License keys can be obtained contacting us by drivers@zoomdigitalhome.com.br. License keys are issued on a per controller basis. You only need a single license key for multiple instances on the same controller.

License price is US\$ 75.00

Dealer Support

Any help or support questions, please, contact us by drivers@zoomdigitalhome.com.br.

Device Setup


Set up your device as recommended by manufacturer's instructions.

Pay attention to IP address and communication port.

Set a static IP or reserve it on DHCP server.

Installation Process

1. Please check the latest driver version on www.zoomdigitalhome.com.br/drivers;
2. Under the Lighting tab in configurator, add a new Communication Device;
3. Use the Search Folder button to point the Configurator to the location of you saved the driver;

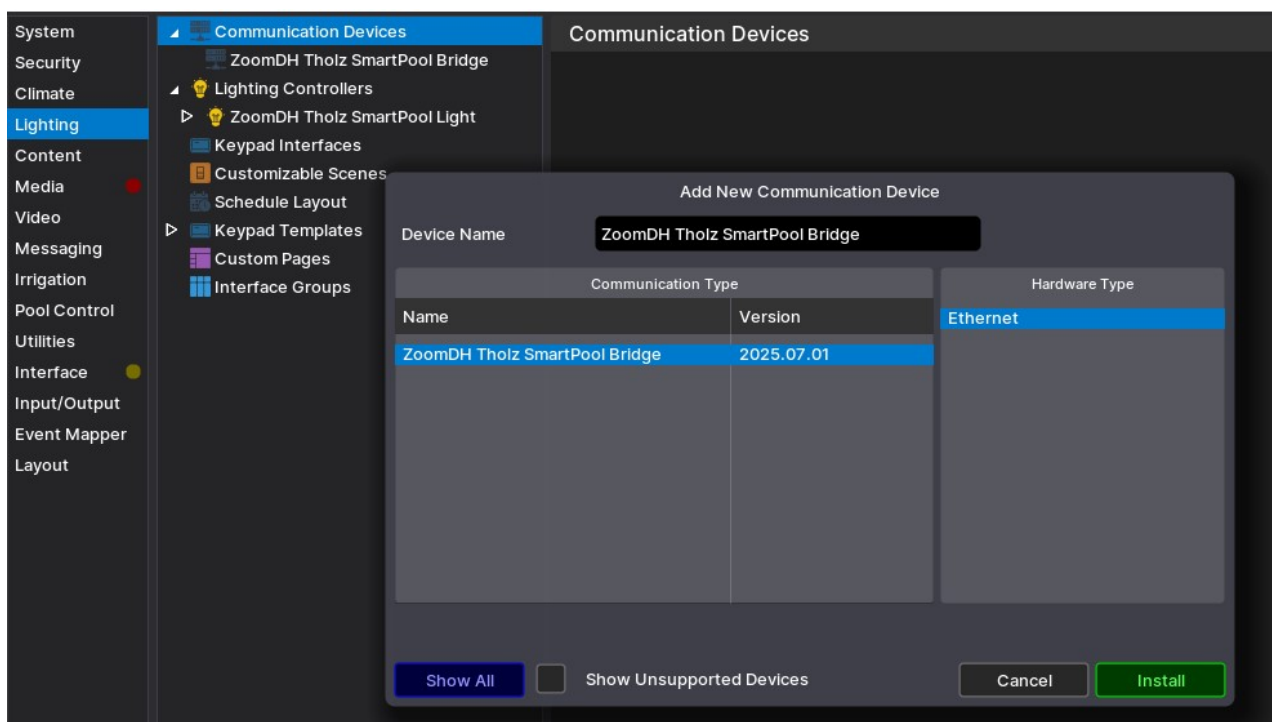

4. Select the driver and click OK;
5. The driver will create the RGB Light, effects and auxiliary outputs;
6. Set the IP Address of the device in the proper property.
7. Go to the Thermostats -> Thermostat Settings and select the Temperature Sensor that you want to use by each thermostat.

Resources ID Tag

If you need to change some resource, please pay attention no correct ID Tag:

- a. RGB Light ID tag: "led0"
- b. Effects ID tag: "effect0", "effect1", ... "effect7"
- c. Auxiliary Outputs ID tag: "out0", "out1", ... "out4"

Common Mistakes

- 1. Incorrect IP address or TCP port settings (default 4000).
- 2. Incorrect ID Tag setting.

Release Notes

2025.08.06 – Initial revision.

Nice Developer Partner Information

This Nice driver was written and supported by:



www.zoomdigitalhome.com.br
drivers@zoomdigitalhome.com.br